

Diesel Generator Set

S350

350 kW / 438 kVA

Standby Power @ 60Hz

319 kW / 398 kVA

Prime Power @ 60Hz

STANDARD FEATURES

- Diesel engine, EPA and CARB certified, electric starter, battery charging alternator 24V, electronic governor
- Single bearing alternator IP 21, Class H insulation
- High Ambient Radiator – 50° C
- Integral vibration isolation
- Dry type air filter
- Main line circuit breaker
- 24V battery, rack and cable
- User manual
- CSA Certified



- Ingersoll-Rand provides a full line of products with high quality recognized engines and alternators.
- All generator sets are factory tested. All generator set models are prototype tested.
- A two-year/2000-hour limited warranty included. Extended warranty option available.
- Service and parts are available from Ingersoll-Rand distributors.

GENERATOR RATINGS

Voltage	Hz	Phase	P.F	Standby Amps	Standby Ratings kW/kVA	Prime Ratings kW/kVA
277/480	60	3	0.8	527	350 / 438	319 / 398
254/440	60	3	0.8	561	342 / 428	319 / 398
127/220	60	3	0.8	1122	342 / 428	319 / 398
120/208	60	3	0.8	1159	334 / 418	304 / 380

Standby ratings are available for the duration of any power outage. No overload capacity is specified at these ratings. Prime ratings are available per BS 5514, DIN 6271, ISO-3046 and IEC 34-1 with 10% overload capacity one hour in twelve hours.

Ratings are per standard environmental conditions. Please consult factory for deration.



S350 APPLICATION DATA

350 kW / 438 kVA Standby Power @ 60Hz | 319 kW / 398 kVA Prime Power @ 60Hz

ENGINE DATA

Manufacturer	VOLVO
Model	TAD1241GE, 4-cycle, Turbocharged
Cylinder arrangement	6 In-Line
Displacement	740.2 in ³ (12.13 L)
Bore and stroke	5.2 in (131 mm)X 5.9 in (150 mm)
Compression ratio	17.5:1
Rated rpm	1,800
Piston speed	29.5 ft/s (9 m/s)
Max. stand by power at rated rpm	506.5 bhp (378 kW)
Frequency regulation, no load to full load	NA
Speed regulation, steady state	+/- 0.5%
BMEP	285.5 psi (19.7 bar)
Governor type	Electronic

OPERATING DATA

EXHAUST SYSTEM

Exhaust gas flow	Exhaust temperature	Max back pressure
2331 cfm (1100 L/s)	869 °F (465°C)	2.87 in Hg (9.7 kPa)

FUEL CONSUMPTION – STANDBY RATING

100% (Load)	75% (Load)	50% (Load)	25% (Load)
20.9 gal/hr (79.2 L/h)	15.5 gal/hr (58.5 L/h)	10.5 gal/hr (39.8 L/h)	NA gal/hr (NA L/h)

LUBRICATION SYSTEM

Total oil capacity w/filters	Oil pressure low idle	Oil pressure rated RPM	Oil consumption 100% load
9.2 gal (35 L)	36.2 psi (2.5 bar)	79.7 psi (5.5 bar)	0.0 gal/hr (0.12 L/h)

AIR INTAKE

Max intake restriction	Engine air flow
20 in H ₂ O (4.98 kPa)	2,331.0 (cfm1100 L/s)

COOLING SYSTEM

Radiator & engine capacity max.	Water temperature	Outlet water temperature	Fan power	Fan air flow	Engine heat rejection
11.6 gal (44 L)	217.4 °F (103 °C)	199.4 °F (93 °C)	15 kW	19,813.5 cfm (9.35 m ³ /s)	7,903.5 Btu/mn (139 kW)



S350 APPLICATION DATA

350 kW / 438 kVA Standby Power @ 60Hz | 319 kW / 398 kVA Prime Power @ 60Hz

ALTERNATOR DATA

Manufacturer	LEROY SOMER
Type	LSA471M4
Poles	4
Exciter type	AREP
Insulation — class/temperature rise	H / 150°C/40°C (Standby)
Voltage regulator	R448
Bearing	1
Coupling	Direct
Voltage regulation 0 to 100% load	+/-1.5%
Recovery time (20% Volt dip) ms	<500
Peak motor starting kVA@480V	900 (35% voltage dip)

- Compliance with NEMA (IEC 34.1/34.2 MG1.22, UTE: NFC 51.111, VDE 0530 BS 4999 & 5000, CSA, ISO 8528.3)
- 2/3 pitch, 12 leads reconnectable
- Vacuum-impregnated windings with epoxy varnish. IP21 drip proof
- Generator allows as standard sustained short circuit current of up to 300% of rated current for up to 10 seconds

CONTROL PANEL

Intellisys™ Standard features

- Powerful & flexible Microprocessor-based digital control panel for easy genset operation
- 8-line 21-character backlit LCD screen for convenient operator access
- Quick access to all generator and engine measurements and status
- User-friendly and non-volatile alarm & fault history with date-time stamp
- Built-in generator and engine protection parameters
- Field-proven and well-documented control panel components
- Supports engine pre-glow, battery charger, coolant heater, auto-start options.
- Capable of local or remote monitoring & control of genset via dedicated RS485 port.

Intellisys™ digital control panel is available on all models. Compatible with 12 or 24 Volt engine electrical system.



Options

- Software for remote management
- NFPA 110, Level 1 Control Panel



S350

350 kW / 438 kVA Standby Power @ 60Hz | 319 kW / 398 kVA Prime Power @ 60Hz

OPTIONS

Engine and Radiator

- Heat shield protection
- Oil drain extension
- Heavy duty air filter
- Lube oil drain pump
- Radiator core guard
- Battery charger, equalize/float type
- Block heater

Enclosed Unit

- Sound attenuated enclosure (73dba @ 23 Ft-full load)

Alternator

- Anti-condensation heater
- Enforced impregnation
- Oversized alternator

Exhaust

- Industrial silencer exhaust kit
- Residential silencer exhaust kit
- Critical silencer exhaust kit

Fuel

- Day tank
- Sub base fuel tanks UL-142
- Fuel/water separator filter

Control panel

- NFPA 110, level 1 control panel
- Remote annunciator

Literature


- Parts manual
- Maintenance manual
- Operation manual

Service & Extended Warranty

- Trained service personnel providing IR parts, service and maintenance packages
- Extended Warranty

WEIGHT AND MEASUREMENTS

Open model	S350
Weight	6,234 lb Net 7,512 lb Gross (2,829 Kg Net 3,409 Kg Gross)
Overall size — l x w x h	131" x 50" x 74" (3,328 mm x 1,262 mm x 1,892 mm)

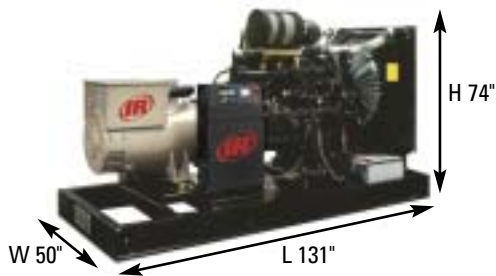

Sound attenuated	Silencer mounted inside
Weight	10,005 lb Net 11,085 lb Gross (4540 Kg Net 5030 Kg Gross)
Overall size — l x w x h	175" x 58" x 88" (4,440 mm x 1,470 mm x 2,230 mm)



Distributed by:

IR Ingersoll-Rand (877) IR POWER www.irenergysystems.com

Nothing contained in this brochure is intended to extend any warranty or representation, expressed or implied, regarding the products described herein. Any such warranties or other terms and conditions of sale shall be in accordance with Ingersoll-Rand's standard terms and conditions of sale for such products which are available upon request. Product improvement is a continuing goal at Ingersoll-Rand. Designs and specifications are subject to change without notice or obligation.
© 2003 Ingersoll-Rand Co.